

# NetXpert XG



**LAN QUALIFIERS**  
FROM 100MB/S TO 10GB/S ETHERNET

## The all-in-one cable application qualifier

Speeds from 100Mb/s to 10Gb/s Ethernet, copper, fiber, cable tests, active network tests, WiFi, POE, and reporting characterize the environment of the application qualifier.

Cable qualification means prove by testing. Prove cable performance, prove network configuration, and prove end device configuration.

In the area of WiFi access points in particular, higher and higher data rates also play an important role on the uplink port. In order to find out whether the older, existing cabling supports the higher data rates, operators can prove cable speed before commissioning access points to avoid any unpleasant surprises.

### Prove and document the application speed with NetXpert XG

#### NETXPERT XG SERIES: THE MODELS

**NetXpert XG - 1G**  
Entry-level

**NetXpert XG - 2.5/5G**  
Enhanced speed performance

**NetXpert XG - 10G**  
Max speed performance

**NetXpert XG-PLUS**  
The flagship - Max speed performance, copper and fiber optic testing

**NetXpert XG - Fiber Extension Kit**  
Adds fiber to a copper only tester



## GET YOUR NETWORK TO TOP SPEEDS

The NetXpert XG proves whether copper cabling supports Ethernet transmission up to 10Gb/s regardless of which cable category, patch panels, or junction boxes were used; everything in-between is tested because this is your application.

After checking the wiremap and advising of distance to opens/shorts and noting reversals/miswires, the NetXpert XG proves speed to IEEE standards by automatically running three individual tests and combining these into an overall result.


The three tests: Signal-to-noise ratio (SNR), followed by a bit error rate test (BERT), and then delay skew test. All required to prove and qualify the gigabit transmission.

Wiremap is important, but SNR can provide evidence of nearby power cables interfering with the data signal. BERT can show dropped bits caused by improper shielding or bending for copper or fiber. Delay skew indicates length differences in pairs; if there is too much delay, the receiver will not be able to assemble the data properly.

## Your benefits

### All-in-one, scalable application qualifier

- Prove copper or fiber cable speed up to 10Gb/s
- Prove active network configuration for copper, fiber, and WiFi
- Prove end device connectivity and find duplicate IP addresses
- Troubleshoot POE up to POE++
- Create reports and document network devices and findings
- Extend NetXpert XG capabilities with evergreen firmware updates

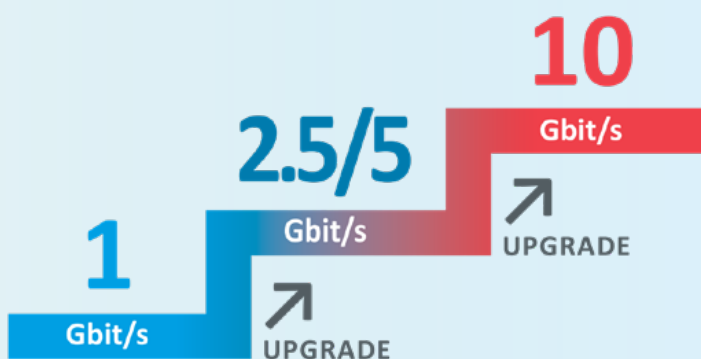

## DESIGNED FOR THE CHALLENGES OF THE FUTURE

NetXpert XG is a scalable high-speed qualifier.

The NetXpert XG series offers easy firmware upgrades, and a licensing system enables upgrades as new features are released.

Three performance levels (1 or 2.5/5 or 10Gb/s Ethernet) are available. The purchase of a "step-up" license increases the speed testing of the device by one step.

For example, if you started with the 1 Gb/s copper version of the NetXpert, simply purchases 2 step-up licenses later to enable 10Gb/s performance. And, buy the fiber extension kit and start qualifying fiber optic lines.

## Technical properties

### PASSIVE CABLE TESTS

- Test against IEEE 802.3 compliance for data cabling at transmission rates up to 10Gb/s
- **Copper cabling:**
  - Determine signal-to-noise ratio (SNR)
  - Execute bit error rate test (BERT)
  - Determine delay skew
  - Measure length of cable using combined TDR and capacitive measurements for a more precise measurement and simpler troubleshooting, even with short circuits
  - Color wiring diagram shows interruption, swap, short circuits, and split pairs so they can be clearly identified
- **Fiber optic cabling:**
  - Execute bit error rate test (BERT)
  - Includes LiveLight, a real-time, continuous trend of fiber light loss measurement so you can watch, in real-time, the loss effects of moving a connector or cable
  - Length of fiber measurement from SFP to SFP
  - Evaluate connector end faces using an optional fiber microscope



For network discovery, simply connect NetXpert XG to a switch (copper and WiFi included in base unit, fiber if enabled)



Standards-compliant signal-to-noise ratio (copper) and bit error rate tests (BERT)(copper and fiber) show the performance of cabling

### ACTIVE ETHERNET TESTS

- PoE load test up to 90W (class 8)
- DHCP test
- Locate devices on the network (network discovery)
- Definition and storage of ping lists
- Traceroute
- LLDP/CDP detection and analysis
- WiFi scan of the available access points (2.4GHz or 5GHz with dongle)
- Detect VLANs

### TROUBLESHOOTING ACTIVE NETWORKS

The NetXpert XG offers extensive tools for troubleshooting active networks. PoE up to the highest performance class (PoE++) are tested for stability and by stress tests, devices on the network are identified (network discovery), and devices are checked for accessibility (ping and traceroute).



### ENABLE PORTS FOR FIBER OPTIC TESTS

The NetXpert XG offers full flexibility regardless of whether you are testing fiber optic or copper cabling. When it comes to passive tests, a throughput test of the fiber optic cabling is also possible (with NetXpert XG-PLUS or upgrade with extension kit).

### QUALIFICATION OF FIBER OPTIC CABLING

The classic measurements on fiber optic links only contain information about the attenuation and the reflection behavior, but this does not prove whether the Ethernet performance can actually be achieved. The BERT test of the NetXpert XG-PLUS proves that the cable links can run at the planned application speed, either 1Gb/s or 10Gb/s multimode or single mode.


Old, existing cables can also be tested as to whether they can, for example, handle an increase in the transmission speed to 10Gb/s, or if you have to rip and replace.

### AUTOMATED ASSESSMENT OF CONNECTOR END SURFACES SAVES YOU TIME AND HEADACHES


In the world of fiber optic cables, defects such as scratches or chipping, and especially dirt on the fiber end faces of connectors, are the main cause of errors and deterioration of the transmission quality on the transmission lines.

Contamination leads to increased reflections and an increase in insertion loss over the entire line. Contamination can lead to scratching or even the destruction of the fiber end faces of other connectors when connecting patch cables. Examining the connector end faces of the cabling before each plug-in operation and cleaning them adequately is essential. In combination with the optionally available electronic microscope, the NetXpert XG offers the ability to view all four connector end faces of a classic duplex cable, evaluating them against the IEC 61300-3-35 standard and including the results in the documentation as a graphic.

### MAIN UNIT CONNECTIONS

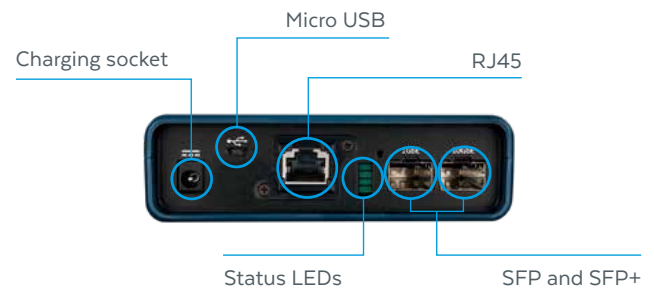

### AM ACTIVE REMOTE CONNECTIONS

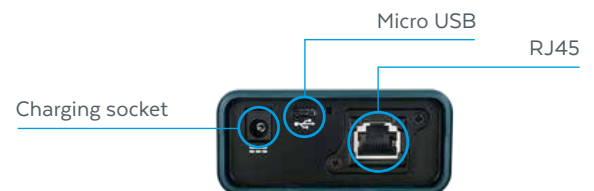

The optional fiber optic microscope can be used to quickly and easily check the connector end faces and provide an automatic "pass/fail" assessment



# Which model is right for you?

Model	NetXpert XG 1G				NetXpert XG 2.5/5G				NetXpert XG 10G				NetXpert XG-PLUS			
	Active Network Tests		Passive Qualification		Active Network Tests		Passive Qualification		Active Network Tests		Passive Qualification		Active Network Tests		Passive Qualification	
	CU	FO	CU	FO	CU	FO	CU	FO	CU	FO	CU	FO	CU	FO	CU	FO
Application/ Medium																
Maximum speed																
10Gb/s	—	—	—	—	—	—	—	—	✓	✓	✓	—	✓	✓	✓	✓
2.5/5Gb/s	—	—	—	—	✓	—	✓	—	✓	—	✓	—	✓	—	✓	—
1Gb/s	✓	✓	✓	—	✓	✓	✓	—	✓	✓	✓	—	✓	✓	✓	✓
WiFi	✓	—	—	—	✓	—	—	—	✓	—	—	—	✓	—	—	—
Accessories																
Compatible with digital fiber optic video microscope			✓	—			✓	—			✓	—			✓	—
Reporting																
Internal project management			✓	—			✓	—			✓	—			✓	—
Creation of reports (csv, pdf, xml)			✓	—			✓	—			✓	—			✓	—
Upgrades/Extensions																
Can be upgraded to the next speed level			✓	—			✓	—	Already at maximum speed				Already at maximum speed			
Extension kit for fiber optic measurement			✓	—			✓	—	✓				Already included			

## WORLD HEADQUARTERS

Softing IT Networks GmbH  
Richard-Reitzner-Allee 6 85540  
Haar  
Germany  
☎ +49 89 45 656 660  
✉ [info.itnetworks@softing.com](mailto:info.itnetworks@softing.com)

## NORTH AMERICA HEADQUARTERS

Softing Inc.  
7209 Chapman Hwy  
Knoxville TN 37920  
USA  
☎ +1.865.251.5252  
✉ [sales@softing.us](mailto:sales@softing.us)

Find your local distributor:  
[itnetworks.softing.com/contact](https://itnetworks.softing.com/contact)

[itnetworks.softing.com](https://itnetworks.softing.com)

For more information, please contact:

©2020 Softing IT Networks GmbH. In line with our policy of continuous improvement and enhancement, product specifications are subject to change without notice. Subject to changes and errors. All rights reserved. Softing and the Softing logo are trademarks of Softing AG. NetXpert and the NetXpert Logo are trademarks of Softing IT Networks GmbH. All other cited trademarks, product and company names or logos are the sole property of their respective owners.